

# DIAMOND BAR REPLACEMENT METHODE



1-Get your new replacement bar.




2- Remove lines and lead lines.



3-Undo the knot below the clam cleat.



4-Remove the stoper ball.

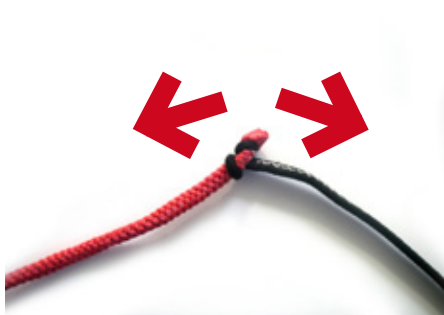

5- Remove the depower and safety line.



6 - Do this operation backward on the replacement bar.